


WHY 1

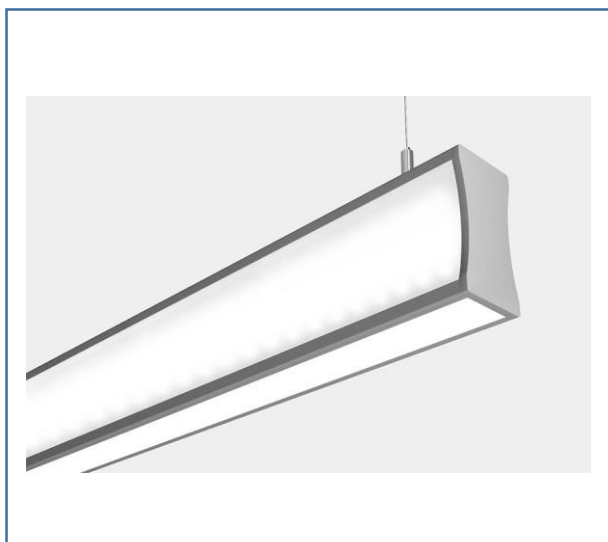

Features:

- Suspended aluminium profile with polycarbonate diffuser illuminating all directions.
- 48% direct, 40% indirect, 6% either side.

	Specification options
Light Source	LED
Power Consumption	63W, 94W, 125W
Lumens	5400Lm, 8100Lm, 10800Lm
Colour Options	3000K, 4000K
Beam Angle Options	-
CRI	80+
Lifetime	50,000 hours
Finish	Grey
Ingress Protection	IP20
Diffuser	Opal polycarbonate
Dimming Options	Contact info@4dlighting.co.uk
Dimensions	L: 980mm/ 1470mm/1960mm