

CODE: CRF

DESCRIPTION

Corrosion resistant enclosure offering high protection from dust and corrosion with IP65 protection.


Available Version:

1x36W	1x28W
2x36W	2x28W
1x58W	1x35W
2x58W	2x35W
1x70W	1x49W
2x70W	2x49W
T8 High frequency only	T5 High frequency only

Emergency versions only available in twin lamp fittings.

SPECIFICATION

- Injection moulded polycarbonate body and diffuser
- Stainless steel clips available (optional)

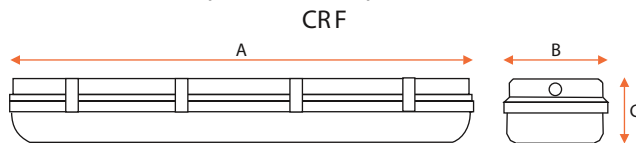

Extra Slim

	L	W	D
1x36	1270	110	101
1x58	1570	110	101
1x70	1870	110	101
2x36	1270	175	101
2x58	1570	175	101
2x70	1870	175	101

	L	W	D
1x28	1200	60	75
1x35	1500	60	75
1x49	1800	60	75
2x28	1200	100	75
2x35	1500	100	75
2x49	1800	100	75

High Frequency - T8		High Frequency - T5	
T2CRF136FZ	1x36 WIP65 HF Gear	T2CRF128FZ	1x28 WIP65 HF Gear
T2CRF236FZ	2x36 WIP65 HF Gear	T2CRF228FZ	2x28 WIP65 HF Gear
T2CRF158FZ	1x58 WIP65 HF Gear	T2CRF135FZ	1x35 WIP65 HF Gear
T2CRF258FZ	2x58 WIP65 HF Gear	T2CRF235FZ	2x35 WIP65 HF Gear
T2CRF170FZ	1x70 WIP65 HF Gear	T2CRF149	1X49 WIP65 HF Gear
T2CRF270FZ	2x70 WIP65 HF Gear	T2CRF249	2X49 WIP65 HF Gear