


# Optos 2

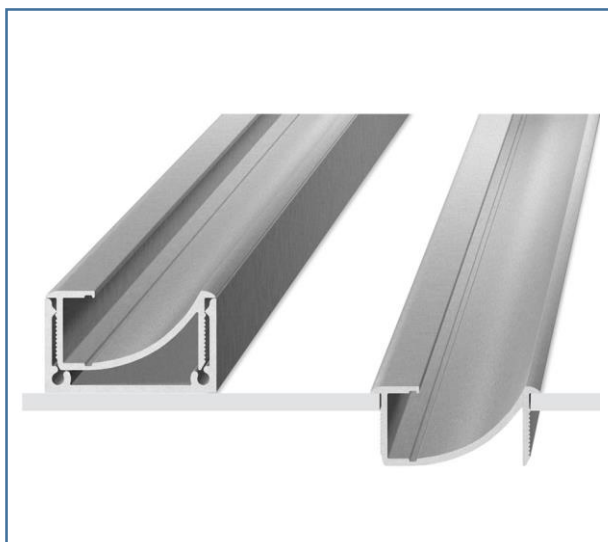

## Features:

- Available to be recessed or supplied with a surface mounted channel for surface mounting installation.

	Specification options
<b>Light Source</b>	LED – Info Per meter
<b>Power Consumption</b>	4.8W, 14.4W, 23W
<b>Lumens</b>	320Lm, 1000Lm, 2500Lm
<b>Colour Options</b>	2700K, 3000K, 4000K
<b>Beam Angle Options</b>	-
<b>CRI</b>	80
<b>Lifetime</b>	50,000 hours
<b>Finish</b>	White, aluminium, RAL
<b>Ingress Protection</b>	IP20, IP67
<b>Diffuser</b>	Opal, frosted, clear
<b>Dimming Options</b>	Contact <a href="mailto:info@4dlighting.co.uk">info@4dlighting.co.uk</a>
<b>Dimensions</b>	W: 35mm x D: 22mm L: Bespoke up to 3300mm